

# ALPHAROPES<sup>®</sup>

PRODUCT CATALOGUE






**SAILMAKER**

TAYLOR MADE

ROPES

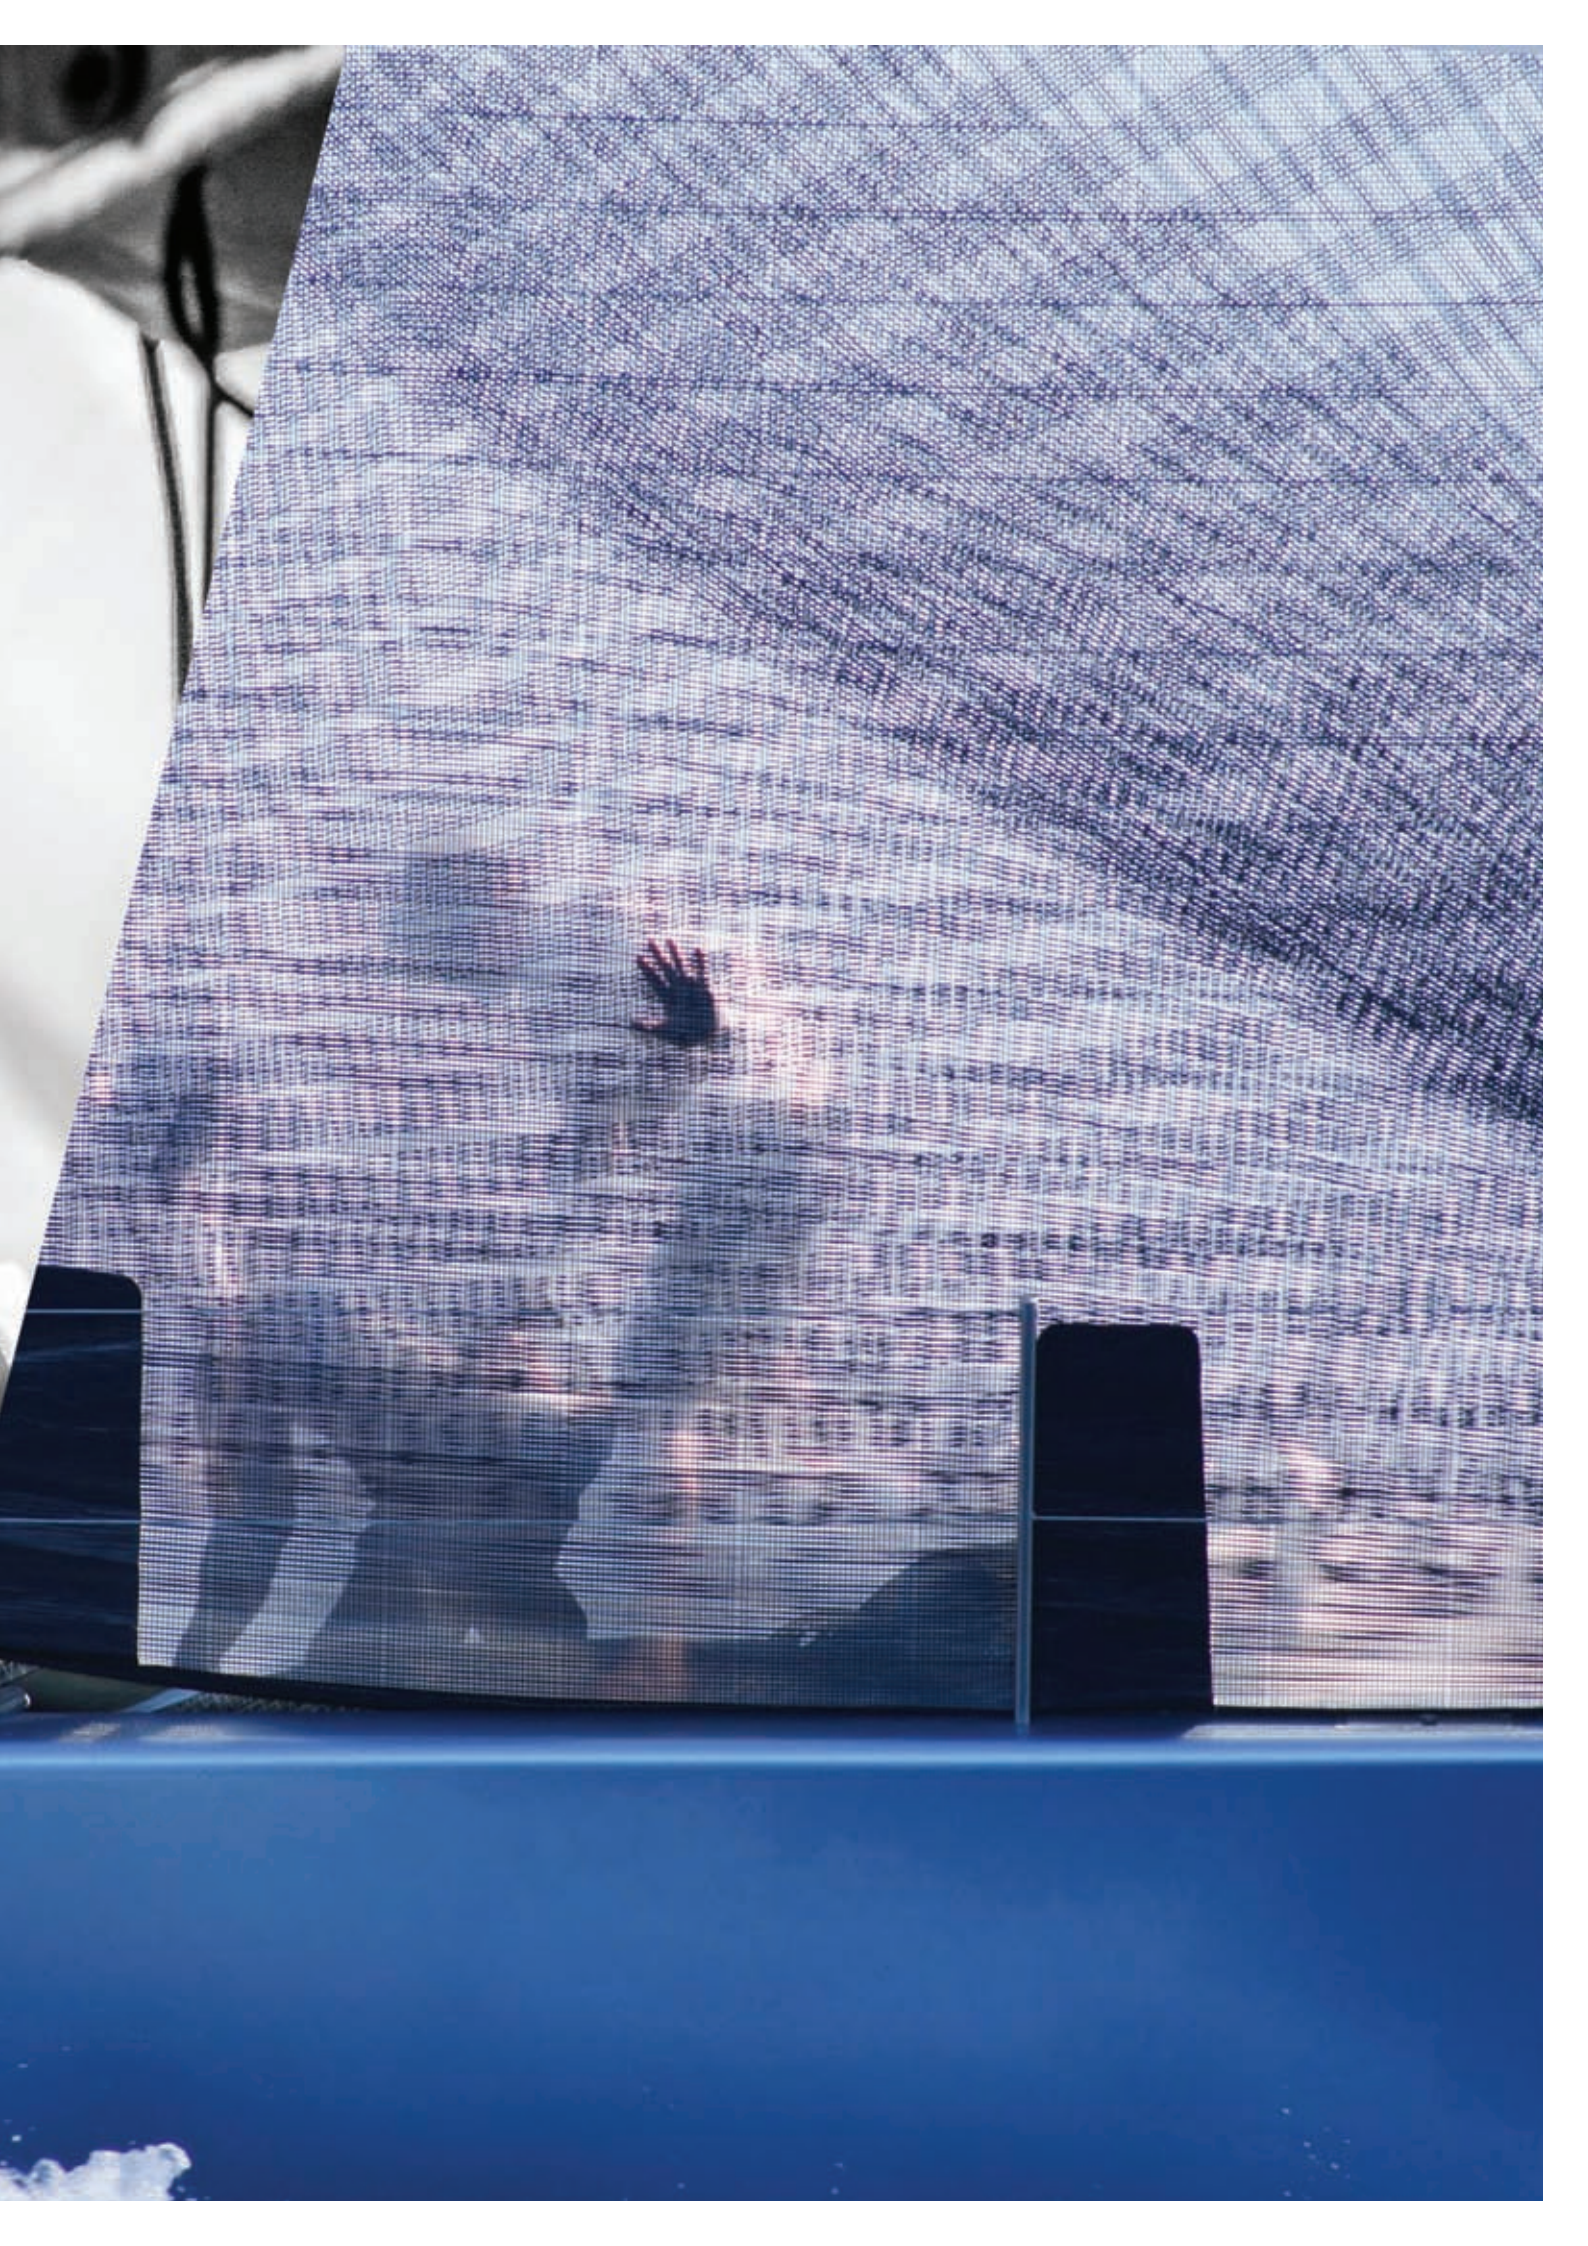

# SAILMAKER



## D CORE 78



### CONSTRUCTION

- Single braid
- 12 strand coated Dyneema® Sk78 core

### FEATURES AND USES

- Lightweight
- Excellent UV resistance
- Low stretched leech lines

### COLORS

- White • grey • black
- yellow
- Other colors on demand

### DIAMETERS

2,5 to 10mm  
7/64" to 3/8"



## V CORE



### CONSTRUCTION

- Single braid
- 12 strand coated Vectran® core

### FEATURES AND USES

- Low creep
- Low stretch
- Luff lines
- Leech lines

### COLORS

- Beige ( Vectran® )

### DIAMETERS

3 to 6mm  
1/8" to 1/4"



## ULTRANEEMA



### CONSTRUCTION

- Double braid
- 16 strand Dyneema® SK78 core
- 16 plait HT Polyester cover

### FEATURES AND USES

- High load all round uses
- Very strong covers
- Good grip on cleats
- Spinnaker leech lines
- Leech lines

### COLORS

- White + flack in black • royal blue • red • green • orange
- yellow
- Other colors on demand

### DIAMETERS

1,6 to 6mm  
1/16" to 1/4"



## SOFTLINE PS



### CONSTRUCTION

- Single braid • 8 X 2 Strand HT Polyester
- Twisted HT Polyester core
- High pre-stretched

### FEATURES AND USES

- Low stretch polyester rope
- Durable
- Leech lines

### COLORS

- Solid red • green • black
- blue • yellow
- Other colors on demand

### DIAMETERS

4 to 8 mm  
5/32" to 5/16"



## LEECH LINE PSKV



### CONSTRUCTION

- Double braid
- 8 X 2 Strand HT Polyester cover
- Twisted Kevlar core

### FEATURES AND USES

- Low stretch
- Low creep
- Leech lines

### COLORS

- White
- Other colors by demand

### DIAMETERS

3 to 8mm  
1/8" to 5/16"



## LUFF LINE



### CONSTRUCTION

- Double braid
- Twisted HT Polyester core
- 16 plait Polyester cover

### FEATURES AND USES

- Very stiff
- Round rope with a pre-shrinking treatment
- Luff lines

### COLORS

- White
- Internal color code

### DIAMETERS

2.8 to 9.8mm  
7/64" to 25/64"



**LUFF LINE PP FILM**



**CONSTRUCTION**

- Single braid
- 3 Strand torsion core

**FEATURES AND USES**

- Economical Luff line

**COLORS**

- Solid blue
- Orange
- Black

**DIAMETERS**

6 to 10mm  
1/4" to 3/8"



**CODE 0**



**CONSTRUCTION**

- Triple braid
- Vectran® Core + Intermediate Kevlar® Jacket
- 32 Plait Polyester cover

**FEATURES AND USES**

- Very low stretch
- Anti-torsion rope
- Code 0 Luff lines
- Anti-torsion rope for Top-Down furlers

**COLORS**

- Solid white or black
- Other colors on demand

**DIAMETERS**


8, 11 and 15mm  
5/16", 7/16"  
and 19/32"

**CODE 0 TACK LOCKERS**



Code 0	Tack Locker
8mm	TL0
11mm	TL1
15mm	TL1

**WEBBING**

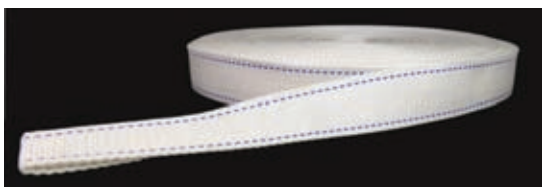

Webbing Standard	Color	mm/inches
Standard	White	12mm / 1/2"
Standard	White	20mm / 13/16"
Standard	White	25mm / 1"
Standard	White	30mm / 1 1/4"

Webbing Heavy Weight	Color	mm/inches
HW	White	12mm / 1/2"
HW	White	20mm / 13/16"
HW	White	25mm / 1"
HW	White	30mm / 1 1/4"
HW	White	40mm / 1 5/8"
HW	White	50mm / 2"
HW	White	63mm / 2 5/8"

Webbing Dyneema SK62	Color	mm/inches
Dyneema	White	12mm / 1/2"
Dyneema	White	20mm / 13/16"
Dyneema	White	25mm / 1"
Dyneema	White	30mm / 1 1/4"
Dyneema	White	40mm / 1 3/4"

Other sizes available by demand

Tubular Heavy	Color	mm/inches
Tubular Heavy	White	25mm/1"

Webbing X Heavy Weight	Color	mm/inches
XHW	White	25mm / 1"
XHW	White	30mm / 1 1/4"
XHW	White	40mm / 1 5/8"
XHW	White	50mm / 2"

Webbing Aramid	Color	mm/inches
Aramid	White	25mm / 1"
Aramid	White	35mm / 1 1/2"



Av. Mosteiro, 486  
4415-493 Grijó - Portugal  
T. +351 227 476 500 / F. +351 227 646 575  
[info@alpha-ropes.com](mailto:info@alpha-ropes.com) / [www.alpha-ropes.com](http://www.alpha-ropes.com)

---

41°01'43.03"N 08°34'59.38"W